


A-190-5 Polyphonic USB/Midi-CV/Gate/Sync Interface

Position und Funktion der Trimpotentiometer, Steckbrücken und Stiftleisten
Position and function of the trimming potentiometers, jumpers and pin headers

Board B (DAC Board)

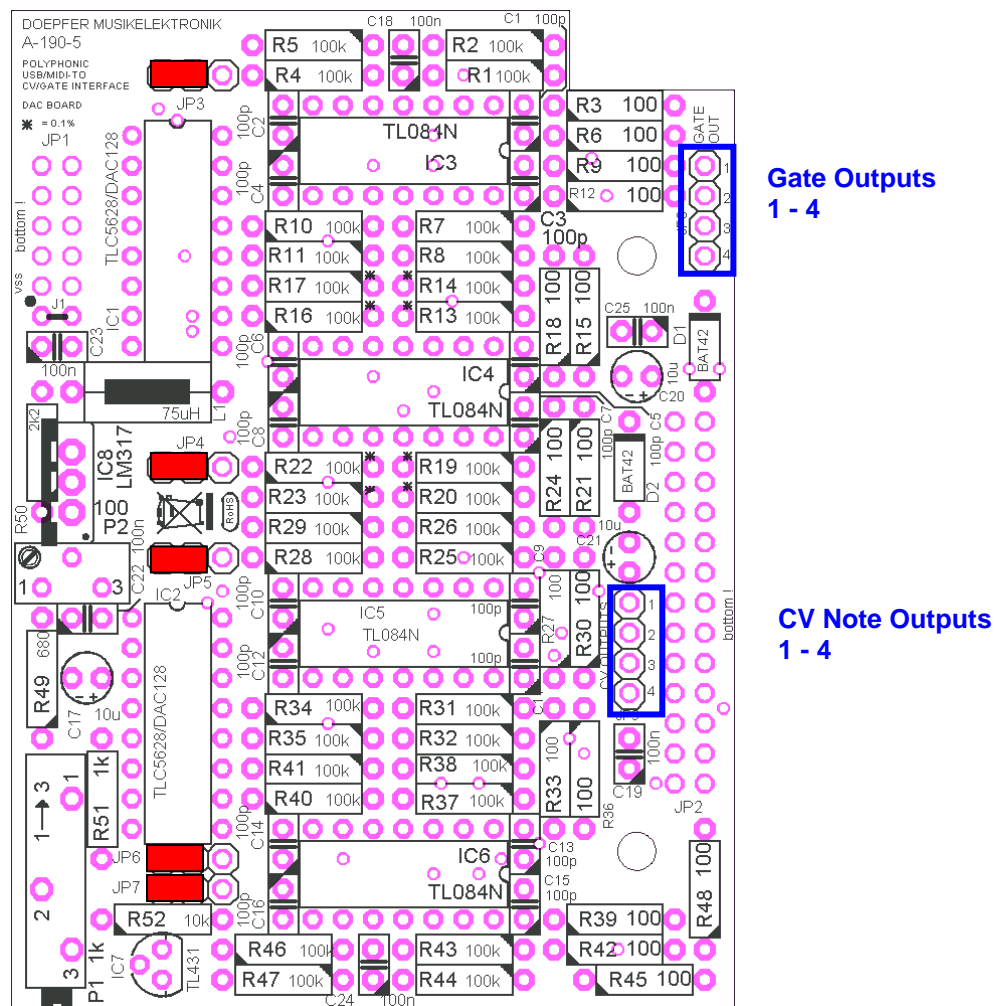

These five jumpers have to be installed in the positions shown above.
Do not change the settings !

The pin headers for the CV and Gate outputs can be used for internal normalling of the polyphonic modules:
The CV Note outputs are typically wired internally to the CV default inputs of the quad VCO A-111-4.
The Gate outputs are typically wired internally to the Gate default inputs of the quad ADSR A-141-4.